

DOLPHIN MARINE

Swages • Swaging Tools
Wire Rope Cutters



**DOLPHIN
MARINE**


MANUFACTURERS
& SUPPLIERS OF
MARINE FITTINGS



HAND COPPER SWAGES BRIGHT OR NICKEL PLATED

Model No	Wire Size Diameter		Tool Used	Hole in Tool	Overall Length Swage	Tool Weight
AA28	1.6 mm	1/16"	AA23	Smallest	10.5 mm 7/16"	1.5 kgs
AA20	2.0 mm	5/64"	AA23	Smallest	10.5 mm 7/16"	1.5 kgs
AA29	2.4 mm	3/32"	AA23 or AA120	Mid Size Smallest	11 mm 7/16"	2.5 kgs
AA30	3.2 mm	1/8"	AA23 or AA120	Largest Mid Size	14 mm 9/16"	1.5 kgs 2.5 kgs
AA31	4.0 mm	5/32"	AA24 or AA120	Smallest Largest	17 mm 11/16"	2.5 kgs 2.5 kgs
AA32	4.8 mm	3/16"	AA24	Largest	21 mm 13/16"	2.5 kgs
AA50	6.4 mm	1/4"	AA131	One Hole Only	25 mm 1"	2.5 kgs

There is no quicker way to form an eye in a length of wire rope. The swage if correctly done should be stronger than the wire rope used.

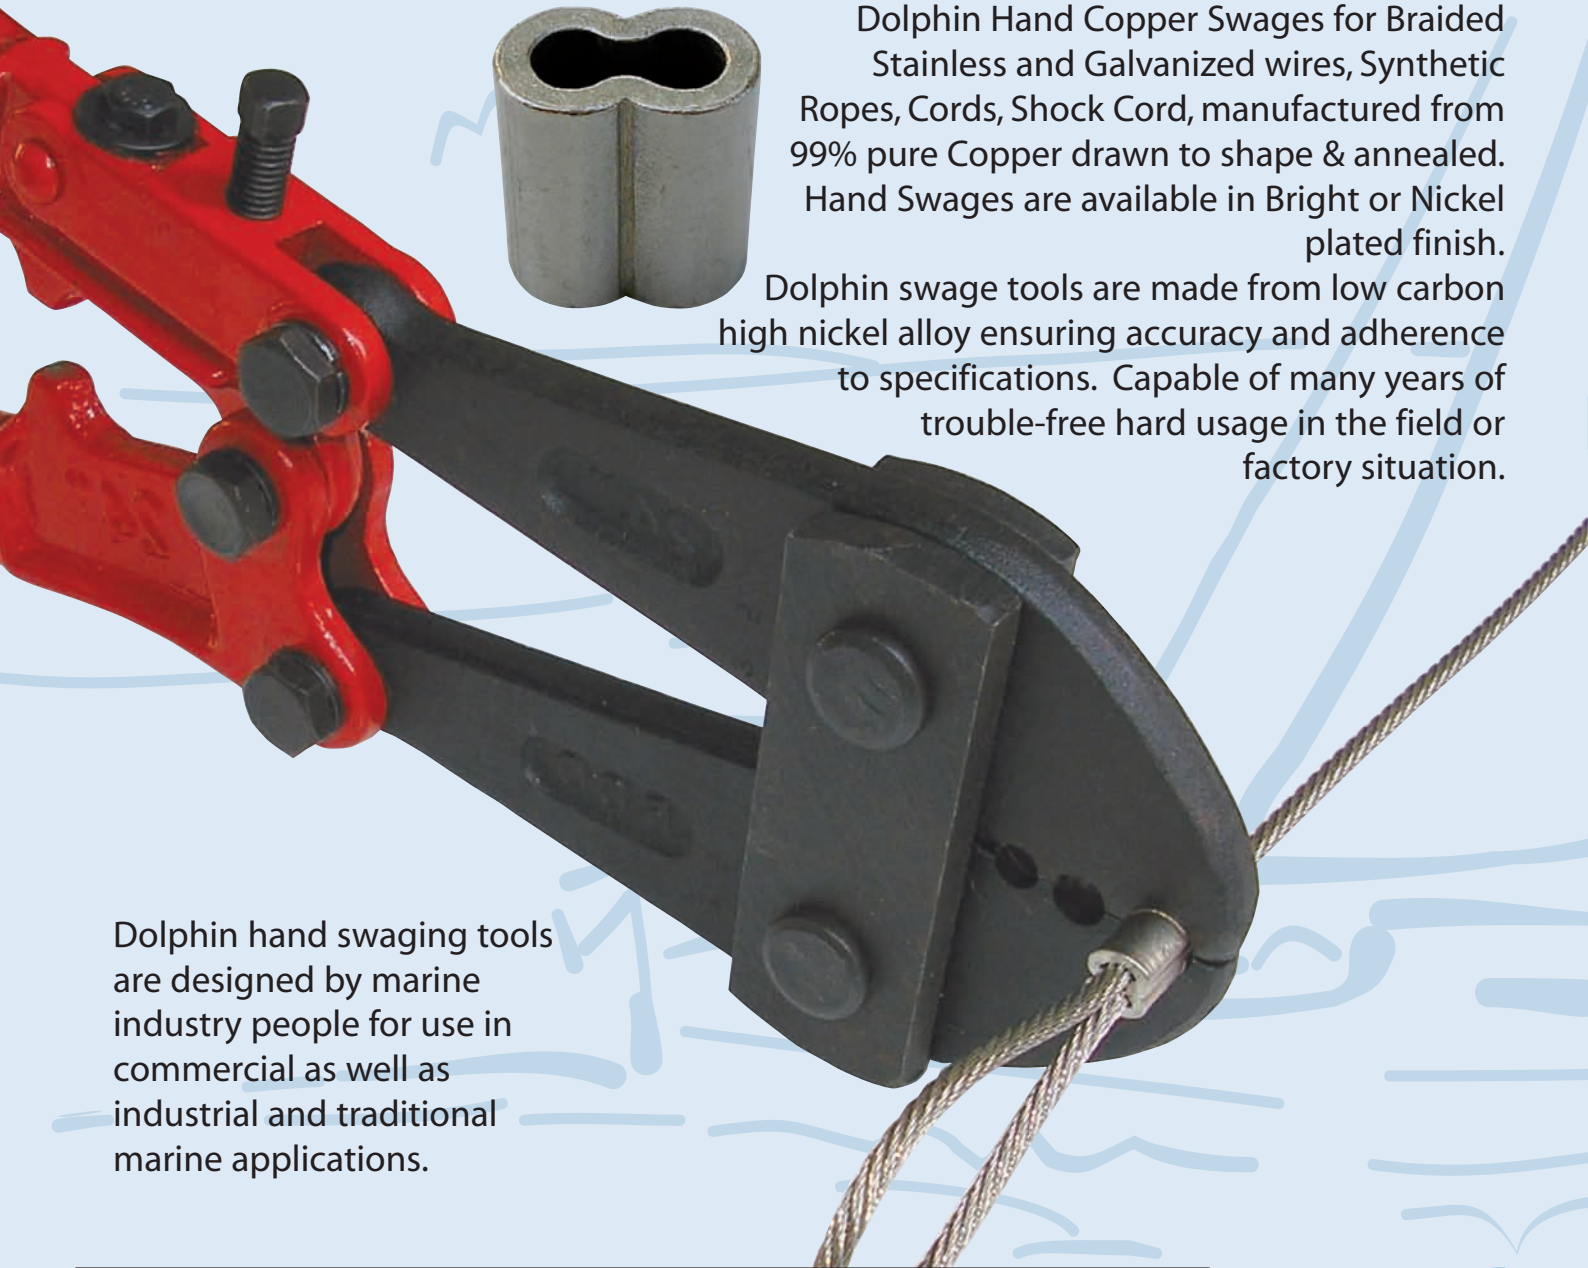

Dolphin Hand Copper Swages for Braided Stainless and Galvanized wires, Synthetic Ropes, Cords, Shock Cord, manufactured from 99% pure Copper drawn to shape & annealed. Hand Swages are available in Bright or Nickel plated finish.

Dolphin swage tools are made from low carbon high nickel alloy ensuring accuracy and adherence to specifications. Capable of many years of trouble-free hard usage in the field or factory situation.

Dolphin hand swaging tools are designed by marine industry people for use in commercial as well as industrial and traditional marine applications.

HAND SWAGE TOOL FOR STAINLESS STEEL OR GALVANISED WIRE

Model No	No of Swage Sizes	Overall Length Swage	Weight	Wire Sizes Imperial	Wire Sizes Metric
AA23	4	18" 460 mm	1.5 kgs	1/16"-5/64"-3/32"-1/8"	1.6mm 2.0mm 2.4mm 3.2mm
AA24	2	24" 610 mm	2.5 kgs	5/32"-3/16"	4.0mm 4.8mm
AA120	3	24" 610 mm	2.5 kgs	3/32"-1/8"-5/32"	2.4mm 3.2mm 4mm
AA131	1	24" 610 mm	2.5 kgs	1/4"	6.4mm

HAND SWAGING TOOLS

TYPICAL APPLICATIONS

- Boat/Yacht Shrouds & Halyards
- Boat/Yacht Backstays & Forestays
- Boat/Yacht Hand or Safety Rails
- Commercial Fishing Long Lines Nets etc.
- Hanging Fluorescent Lights in Factories/Warehouses etc.
- Decorative Hand Rails
- Displays
- Security of Valuable Equipment in Retail Show Rooms & Trade Shows

COPPER AND ALUMINIUM HYDRAULIC FERRULES DIN CODE 3093

DIN Code	Size mm	Swage Length mm
1.5	1.5 mm	5
2.0	2.0 mm	7
2.5	2.5 mm	9
3.0	3.0 mm	11
3.5	3.5 mm	13
4.0	4.0 mm	14
4.5	4.5 mm	16
5.0	5.0 mm	18
6.0	6.0 mm	21
6.5	6.5 mm	23




WIRE ROPE CUTTER

DOLPHIN WIRE ROPE CUTTER

Model	Capacity
AA73D	3 mm
AA75	6 mm


Dolphin Wire Rope Cutter jaws are manufactured for long life and accurate clean cutting of braided multi strand wire ropes.

The Dolphin Wire Rope Cutter cuts an extremely clean edge ensuring ease of use. These cutters are not recommended for cutting bars etc.



COPPER SWAGES FOR SYNTHETIC ROPE AND SHOCK CORD

Model No	Rope Size		Tool Used	Hole in Tool	Overall Length Swage	Tool Weight
AA59	4 mm	5/32"	AA25	Smallest	15 mm	2.5 kgs
AA60	6 mm	1/4"	AA25	Mid Size	15 mm	2.5 kgs
AA61	8 mm	5/16"	AA25	Largest	15 mm	2.5 kgs
AA62	10 mm	3/8"	AA26	Single Only	19 mm	2.5 kgs
AA63	12 mm	1/2"	AA27	Single Only	19 mm	2.5 kgs

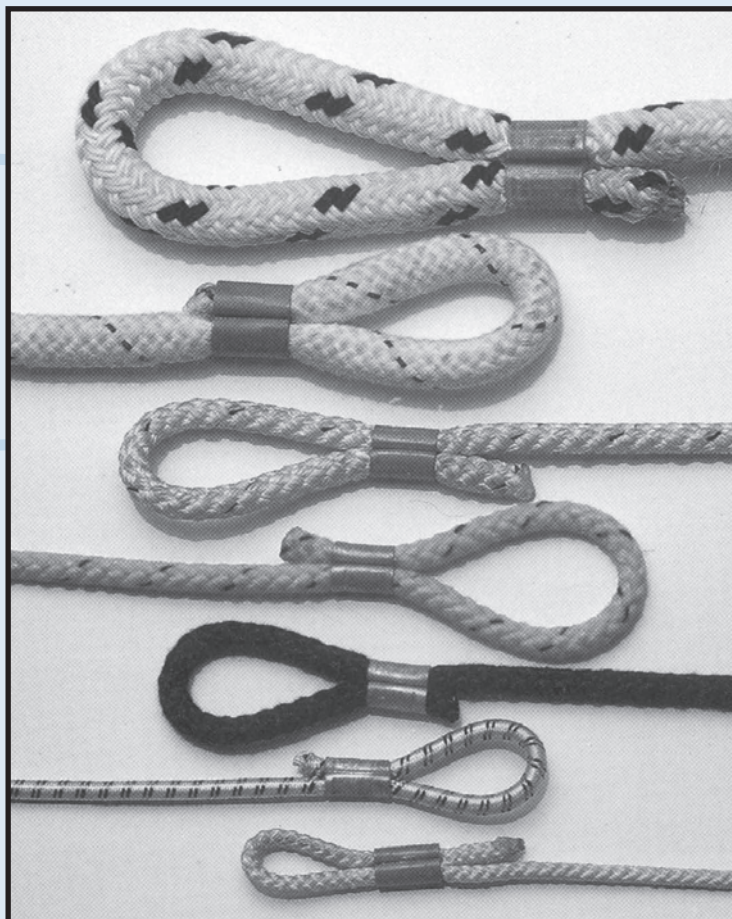

Agent

DOLPHIN MARINE PTY LTD

P.O. BOX 1080, BROOKVALE 2100
 PH: 02 9975 5674 FAX: 02 9402 0174
sales@dolphinmarine.net.au